



SERIES 70 10K PSI / 700 BAR / 7000 M

# SeaKing™ High-Pressure Subsea Connectors, Cables, and PBOF Assemblies




## Product selection guide

### REFERENCE INFORMATION

Materials, contact arrangements, and performance specifications

pg. 2

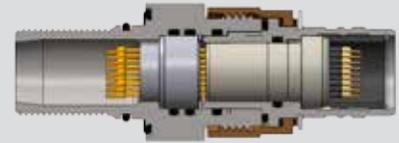

### 700-001

SeaKing™ Cable Connector Plug (CCP), 10,000 psi rated (mated condition), subsea environment, solder termination

pg. 8



### 700-006

SeaKing™ Flange Connector Receptacle (FCR), 10,000 psi rated (open face and mated), subsea environment, solder termination, indexable flange

pg. 9



### 700-007

SeaKing™ Bulkhead Connector Receptacle (BCR), 10,000 psi rated (open face and mated), subsea environment, solder termination

pg. 10



PBOF Assembly System Fittings and Accessories

pg. 11



Overmolded and repairable cable capabilities, tools and accessories

pg. 16



SUBSEA/DEEPWATER: SEAKING™

