


## 980563 - CRT200T Cable Retrieval Tool with Torque Tool Operation

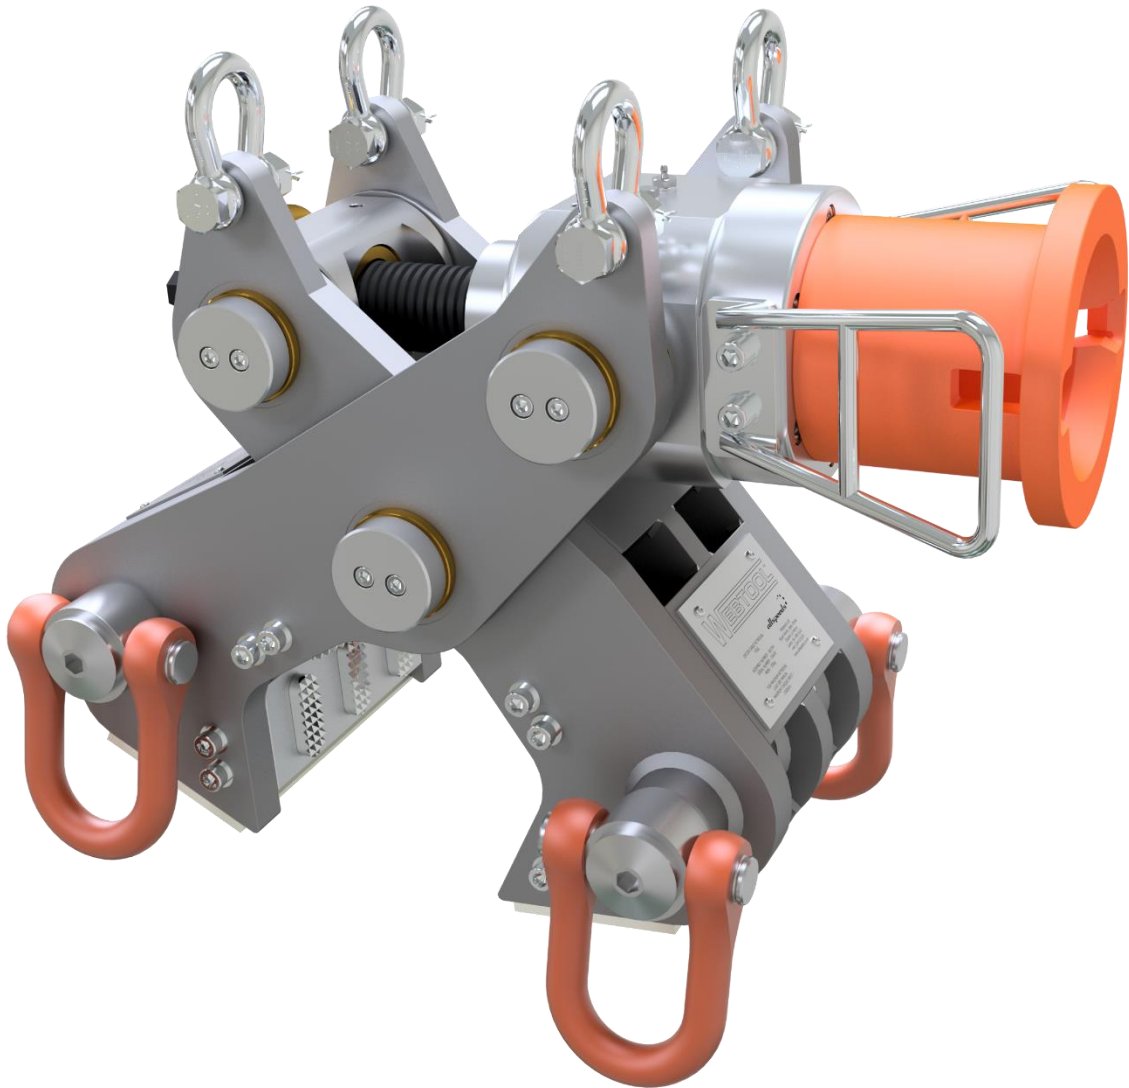

- Torque tool operated cable lifting tool for retrieval and decommissioning projects
- Lifting/gripping capacity – 20 tonnes
- Corrosion resistant steel and stainless steel construction
- Design Verified by DNV-GL
- Mechanically locked gripping action to ensure cable cannot escape during retrieval
- Hydraulic free means no risk of leakage
- Can be used at any water depth
- Approx. weight – 540kg
- Jaw capacity – 4" to 8" diameter cable with interchangeable teeth
- Designed, manufactured and tested in accordance with DNV-GL standards
- Suitable for lifting cables and umbilicals
- Standard tool is shown above. Bespoke and custom designs to suit special applications are available on request

Hydraulic systems specialist, Webtool, announces a gripping and lifting tool for recovering subsea umbilical and cable for offshore oil & gas and decommissioning projects. The Cable Retrieval Tool (CRT200T), developed in consultation with international certification body and classification society, DNVGL, allows the safe and controlled recovery of damaged cable and umbilical, up to 8" (203 mm) diameter.


Current methods of recovering umbilicals for repair or replacement are laborious, time consuming and expensive. They involve trenching the seabed around the cable or umbilical to allow a double choke sling to be attached using a ROV. The torque tool operated, Webtool CRT200T gripper offers a quicker and safer method of retrieval and improved handling.

The CRT200T cable gripper provides a streamlined cable recovery whereby the gripper, guided by an ROV, is lowered onto the end of the cable without requiring preliminary clearing of the soil around the cable. The mechanically locked gripping action ensures the umbilical cannot escape during retrieval. By gripping the end of the cable, it makes subsequent handling much easier, enabling the cable to be recovered to a reeler / spooler on the surface vessel.

The tool design is verified by DNV-GL and has been proof load tested to 46 tonnes in accordance with DNV-GL industry safety factors.



Alternatively available with Hot Stab operation as the **CRT200H** (part number **980562**)

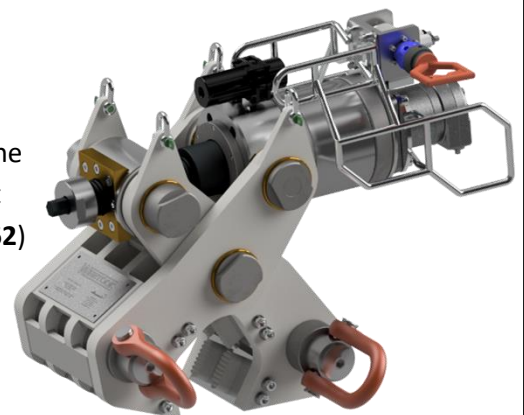

**Webtool – A division of Allspeeds**  
**Royal Works, Atlas Street**  
**Clayton-Le-Moors, Accrington, Lancashire. BB5 5LW**  
**UK Tel: +44 (0) 1254 615 100 Fax: +44 (0) 1254 615 199**

**allspeeds**  
[www.allspeeds.co.uk](http://www.allspeeds.co.uk)