



# OceanTools

## C3-30 HD IP

### Compact 2MP HD IP subsea camera

The **C3** range of ultra-compact subsea cameras offer high quality video in low light level conditions, with low power consumption and depth ratings to 8000m.



## Overview

The cost-effective **C3-30** HD IP streaming cameras have been designed to be as rugged and durable as possible, to suit a wide range of underwater applications including:

- Main ROV camera
- ROV manipulator and tooling camera
- Rear facing camera
- Diver held camera
- TMS camera

The **C3-30** has a wide input voltage range of 15–32VDC and is offered with various underwater Ethernet connectors. The **C3** range also includes the **C3-10** which has an 800 TVL resolution SD composite video output and the **C3-20** which has a digital HD-SDI video output. The cameras are available in 30mm diameter housings with a standard depth rating of 8000m, or a 6000m-rated wide angle (**WA**) variant with a domed viewport and protective shroud.


## Key Features

- Full HD MPEG and MJPEG IP streaming video output
- 0.01 Lux low-light sensitivity
- Sapphire viewport
- Titanium housing
- Up to 104° diagonal angle of view (immersed)



Wide angle (WA) variant






# OceanTools

## C3-30 HD IP

### Compact 2MP HD IP subsea camera

## Specifications

		C3-30-8K (IP)	C3-30-WA-6K (IP)
<b>H.264, H.265 &amp; MJPEG IP Cameras</b>			
<b>Optical</b>	<b>Standard lens</b>	3.6mm	
	<b>Depth of field</b>	300mm to infinity	
	<b>FOV in water</b>	76.9°(D) X 59.7°(H) X 40.9°(V)	104°(D) X 80.8°(H) X 55.3°(V)
<b>Video</b>	<b>Sensor type</b>	1/2.9" SONY CMOS (Progressive Scan) (WDR) 2 Megapixel	
	<b>Min illumination</b>	0.01 Lux @ F1.2	
	<b>Dynamic range</b>	70dB	
	<b>Video standards</b>	H.265 Main Profile, H.264 Main Profile & MJPEG, ONVIF Profile S V2.6	
	<b>Video resolution</b>	Main: 1920x1080, 1280x960, 1280x720, 720x576, 640x480 Sub: 640x480, 480x360, 352x288, 320x240, 176x144 MJPEG: 640x480	
	<b>Network protocols</b>	HTTP, NTP, DHCP, SMTP, RTP, RTSP, DDNS, DNS, HTTPS, P2P	
<b>Environmental &amp; Electrical</b>	<b>Operating depth</b>	8000m	6000m
	<b>Operating temperature</b>	-10°C to +50°C	
	<b>Voltage</b>	24VDC (15-32VDC)	
	<b>Typical current</b>	50mA @ 24VDC	
<b>Mechanical</b>	<b>Length incl connector</b>	180mm	188mm
	<b>Length excl connector</b>	134mm	142mm
	<b>Diameter</b>	30mm	49mm max, 30mm body
	<b>Weight</b>	Up to 0.4kg in air, 0.3kg in water	
	<b>Housing material</b>	Titanium Grade 5	
	<b>Viewing port material</b>	Sapphire (scratch resistant)	High Performance BK7 Glass
	<b>Standard connector</b>	Subconn DBH8M (alternatives available)	

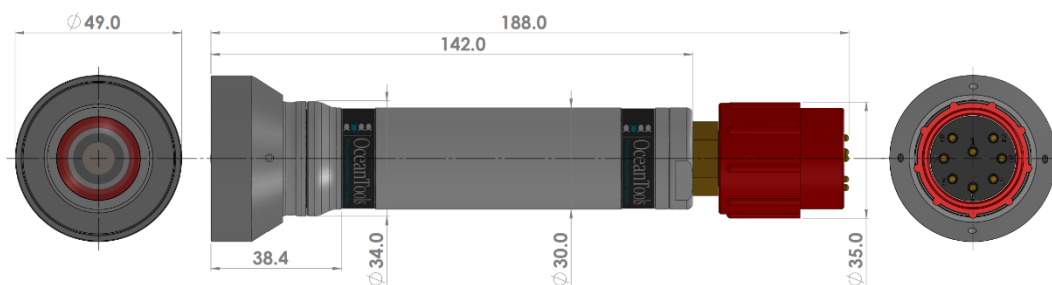

Product datasheets, GA drawings, case studies and other supporting documents are available to download from [data.oceantools.co.uk](http://data.oceantools.co.uk)

All specifications are subject to change without notice. E&OE.

Version 11 (05.09.2023)



OceanTools Ltd  
 OceanTools House Claymore Drive Aberdeen AB23 8GD  
 t: +44 1224 709 606 e: sales@oceantools.co.uk  
[www.oceantools.co.uk](http://www.oceantools.co.uk)